


### General Description

The SA59102 is a current-sense amplifier, served as a voltage-output, current-shunt monitor. The device can sense a shunt voltage drop with a common mode voltage varying from -0.3V to 26V, independent of the supply voltage. The gain can be fixed at 100V/V. The SA59102 has a low offset zero-drift architecture, which can allow the device to function very well in measuring the low voltage drop in the power management unit.

The SA59102 operates from a 3V to 5V power supply. The device is provided in a SOT363 package, and specified over the extended industrial temperature range of -40 °C to 125 °C.

### Ordering Information

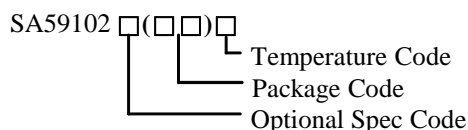

Ordering Number	Package type	Note
SA59102AHA	SOT363	

### Features

- Voltage-output, Current-shunt Monitor
- Wide Common Mode Operation Range: -0.3V~26V
- Gain=100V/V
- Amplifier's Output Referenced to VREF input
- Shunt Drop Range: -20mV to 20mV (VCC=5V, V<sub>REF</sub>=2.5V)
- Low Offset Voltage: ±50μV (Maximum)
- 0.5μV/°C Offset Drift (Maximum)
- ±0.5% Gain Error (Maximum)
- 10ppm/°C Gain Drift (Maximum)
- Quiescent Current: 100μA (Maximum)
- Packages: SOT363

### Applications

DC Bus Monitoring for:

- Body Control Module
- Valve Control
- Motor Control
- Electronic Stability Control
- Wireless Charging Transmitters

### Typical Application


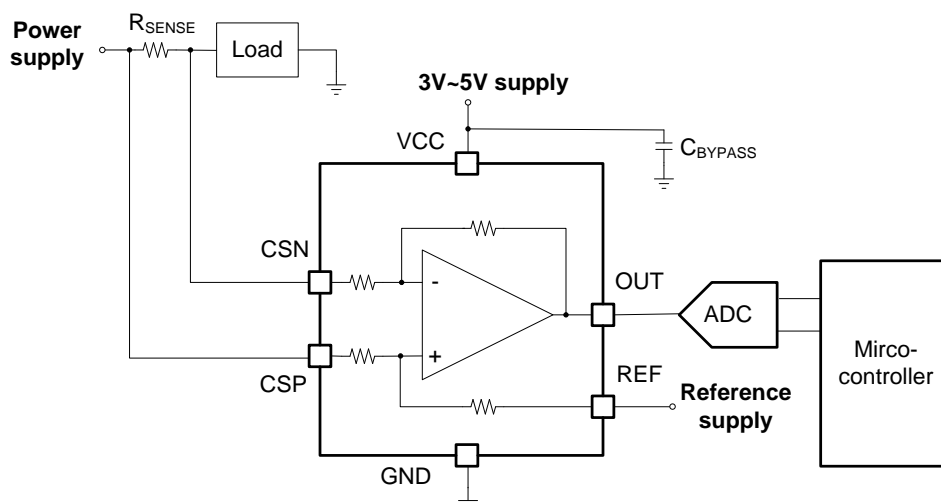


Figure 1. Typical application

Figure. 1 shows the basic connections of the SA59102. The two input pin CSN and CSP should be connected to the shunt resistor as closely as possible to minimize any resistance in series with the sense resistor. A bypass capacitor connected to the power-supply is required for stability concern.

## Pinout (Top View)

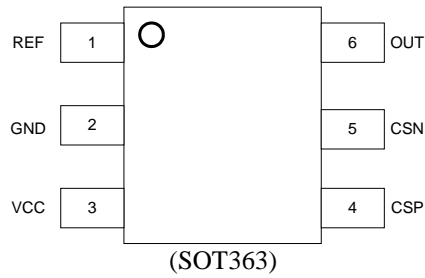

Top mark: **bxyz** (Device code: **b**, **x**=year code, **y**=week code, **z**=lot number code)

Name	Number	Description
REF	1	Reference voltage input.
GND	2	Ground.
VCC	3	Power supply.
CSP	4	Connect to supply side of shunt resistor.
CSN	5	Connect to load side of shunt resistor.
OUT	6	Output voltage.

## Block Diagram

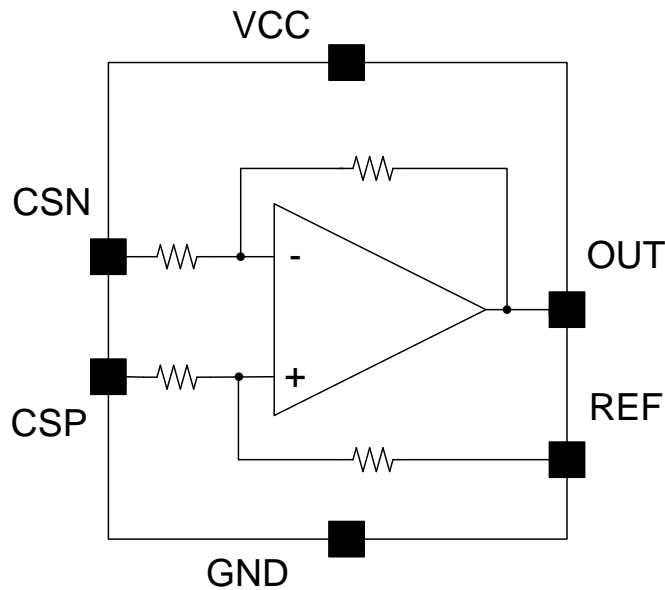


Figure 2. Block Diagram

## Absolute Maximum Ratings

VCC	-----	-0.3V to 5.5V
CSP, CSN		
Common-mode	-----	-0.3V to 26V
Differential	-----	-26V to 26V
REF	-----	-0.3V to VCC
OUT	-----	-0.3V to VCC
Junction Temperature	-----	-40 °C to +150 °C
Storage Temperature	-----	-65 °C to +150 °C

## Recommended Operating Conditions

CSP, CSN (Differential)	-----	-20mV to +20mV
VCC	-----	5V
REF	-----	2.5V
Junction Temperature Range	-----	-40 °C to +125 °C

## Electrical Characteristics

T<sub>A</sub>=25 °C, V<sub>CC</sub>=5V, CSP=12V, and V<sub>REF</sub>=2.5V, unless otherwise noted.

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
<b>Input</b>						
Common-mode Input	V <sub>CM</sub>	T= -40 °C to 125 °C	-0.3		26	V
Common-mode Rejection Ratio	CMRR	CSP=CSN=0V to 26 V, V <sub>SENSE</sub> =0mV, T= -40 °C to 125 °C	105	140		dB
Offset Voltage, RTI (Note 1)	V <sub>OS</sub>	V <sub>SENSE</sub> =0mV, T=25 °C		±1	±50	μV
Offset Voltage vs Temperature	dV <sub>OS</sub> /dT	T= -40 °C to 125 °C		0.1	0.5	μV/°C
Offset Voltage vs Power Supply	PSR	V <sub>CC</sub> =3V to 5V, V <sub>CM</sub> =12V, V <sub>SENSE</sub> =0mV, T=25 °C		±0.1	±6	μV/V
Input Bias Current	I <sub>B</sub>	V <sub>SENSE</sub> =0mV, T=25 °C	30	38	45	μA
Input Offset Current	I <sub>OS</sub>	V <sub>SENSE</sub> =0mV, T=25 °C		±0.02		μA
<b>Output</b>						
Gain				100		V/V
Gain Error		V <sub>SENSE</sub> = -20mV to 20mV, T= -40 °C to 125 °C		±0.02%	±0.5%	
		V <sub>CC</sub> = 3.3V, V <sub>REF</sub> = 0V V <sub>SENSE</sub> = 1 mV to 30 mV, T = -40 °C to 125 °C		±0.02%	±0.5%	
Gain Error vs Temperature				3	10	ppm/ °C
Nonlinearity Error		T=25 °C		±0.01%		
Maximum Capacitive Load		No sustained oscillation, T=25 °C		1		nF
<b>Voltage Output</b>						
Output Voltage Swing to V <sub>CC</sub> Power-supply Rail		R <sub>LOAD</sub> =10kΩ to GND, T= -40 °C to 125 °C		(V <sub>CC</sub> )- 0.05	(V <sub>CC</sub> )- 0.2	V
Output Voltage Swing to GND		R <sub>LOAD</sub> =10kΩ to GND, T= -40 °C to 125 °C		(V <sub>GND</sub> ) +0.005	(V <sub>GND</sub> ) +0.05	V
<b>Frequency Response</b>						
Bandwidth	BW	C <sub>LOAD</sub> =10pF, T=25 °C		28		kHz
Slew Rate	SR	T=25 °C		0.4		V/μs
<b>Noise, RTI</b>						
Voltage Noise Density (Note 2)		T=25 °C		36		nV / √Hz
<b>Power Supply</b>						
Operation Voltage	V <sub>CC</sub>		3		5	V
Quiescent Current	I <sub>Q</sub>	V <sub>SENSE</sub> =0mV, T=25 °C		80	100	μA
		V <sub>SENSE</sub> =0mV T= -40 °C to 125 °C			100	μA

**Note 1:** RTI = referred to input.


**Note 2:** Guaranteed by design.

## Detailed Description


The SA59102 is a current sense amplifier. It is commonly used for over-current detection, voltage feedback control loops, or as a power monitor. This device is intended to operate as Analog Front END (AFE) for ADC or microcontroller requiring high-common mode signal translation to low-side referenced inputs.

### REF Input


The SA59102 device measures the voltage developed across a current-sensing resistor when current passes through the device. With the REF pin connected to a reference voltage (for example 2.5V), the output voltage is biased upwards by this reference level. The output rises above the reference voltage for positive differential input signals and falls below the reference voltage for negative differential input signals. To be noticed that, the output should be high-clamped by VCC and low-clamped by GND.

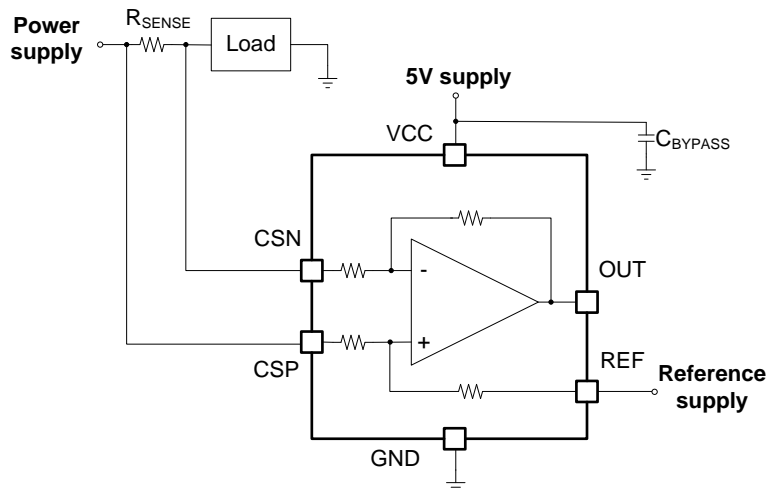


## SOT363 Package Outline Drawing

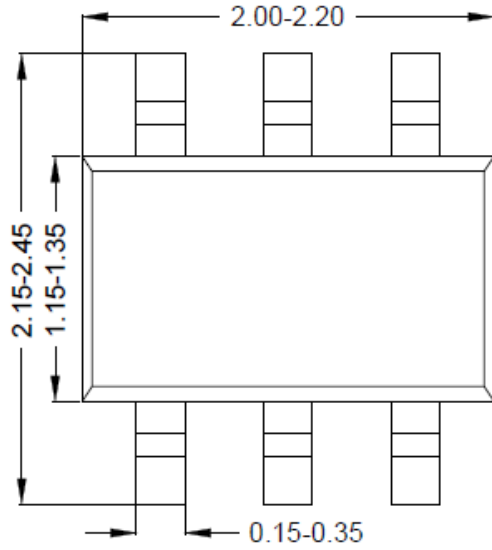


**Top view**

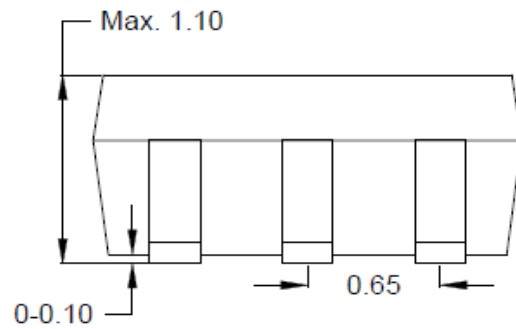

**Side view A**

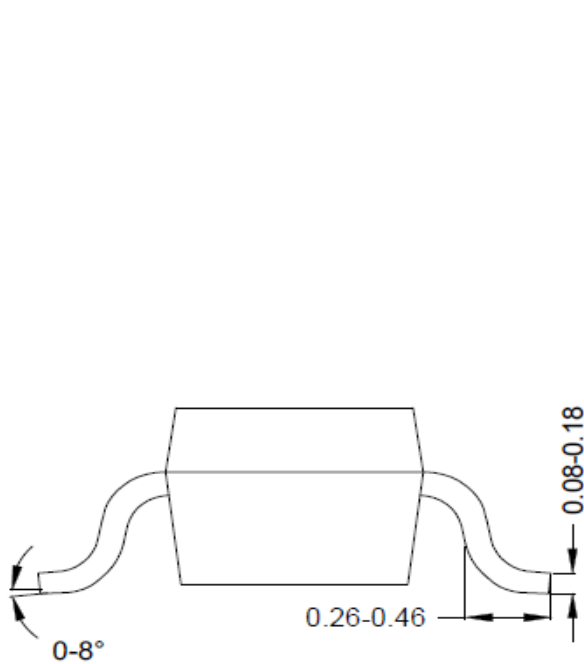

**Side view B**

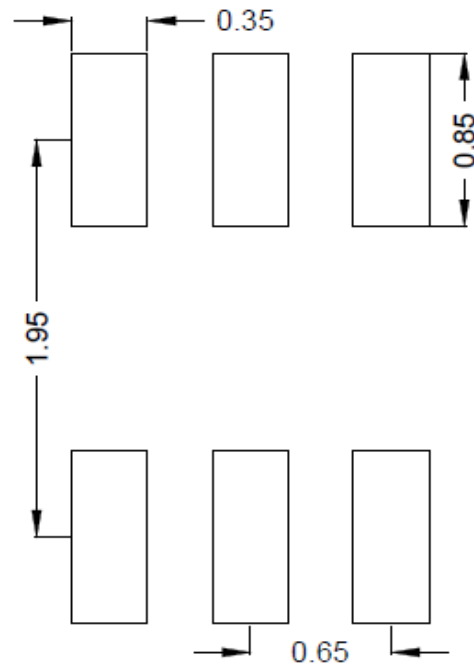


**Recommended PCB layout  
(Reference only)**


**Notes:** All dimension in millimeter and exclude mold flash & metal burr.

## Taping & Reel Specification

### 1. SOT363 taping orientation

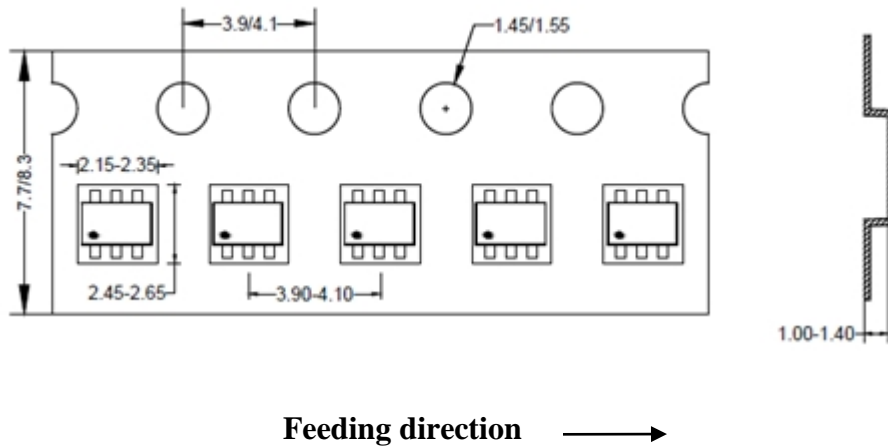

### 2. Carrier Tape & Reel specification for packages

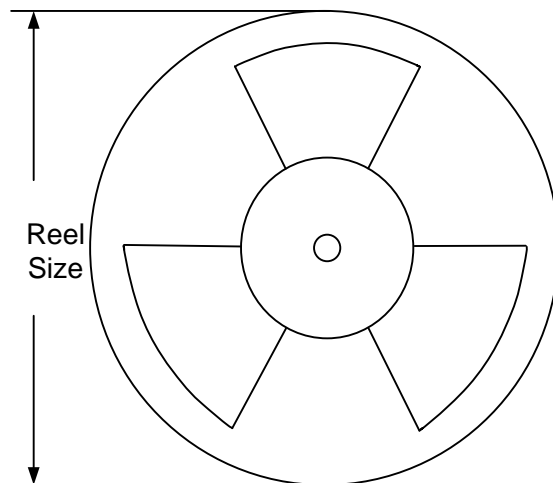

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel (pcs)
SOT363	8	4	7"	400	160	3000

### 3. Others: NA

## IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: [www.silergy.com](http://www.silergy.com)

© 2020 Silergy Corp.

All Rights Reserved.